


# Dual General Purpose Transistors

## NPN Silicon

We declare that material of product compliance with ROHS requirements.

S- Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.

**MBT2222AD  
S-MBT2222AD**

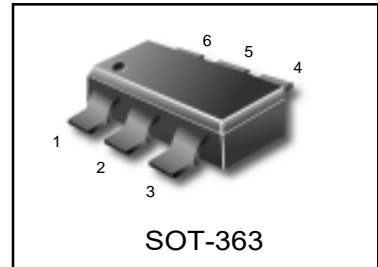


### MAXIMUM RATINGS

| Rating                         | Symbol    | Value | Unit |
|--------------------------------|-----------|-------|------|
| Collector–Emitter Voltage      | $V_{CEO}$ | 40    | Vdc  |
| Collector–Base Voltage         | $V_{CBO}$ | 75    | Vdc  |
| Emitter–Base Voltage           | $V_{EBO}$ | 6.0   | Vdc  |
| Collector Current – Continuous | $I_C$     | 600   | mAdc |

### THERMAL CHARACTERISTICS

| Characteristic   | Symbol          | Max         | Unit               |
|--|-----------------|-------------|--------------------|
| Total Package Dissipation (Note 1)<br>$T_A = 25^\circ\text{C}$ | $P_D$           | 150         | mW                 |
| Thermal Resistance,<br>Junction to Ambient                     | $R_{\theta JA}$ | 833         | $^\circ\text{C/W}$ |
| Junction and Storage Temperature                               | $T_J, T_{stg}$  | -55 to +150 | $^\circ\text{C}$   |



### ORDERING INFORMATION

| Device                   | Marking | Shipping         |
|--------------------------|---------|------------------|
| MBT2222AD<br>S-MBT2222AD | XX      | 3000/Tape & Reel |



**ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

| Characteristic   | Symbol        | Min    | Max        | Unit            |
|--|---------------|--------|------------|-----------------|
| <b>OFF CHARACTERISTICS</b>   |               |        |            |                 |
| Collector–Emitter Breakdown Voltage<br>( $I_C = 10\text{ mAdc}$ , $I_B = 0$ )  | $V_{(BR)CEO}$ | 40     | –          | Vdc             |
| Collector–Base Breakdown Voltage<br>( $I_C = 10\ \mu\text{Adc}$ , $I_E = 0$ )  | $V_{(BR)CBO}$ | 75     | –          | Vdc             |
| Emitter–Base Breakdown Voltage<br>( $I_E = 10\ \mu\text{Adc}$ , $I_C = 0$ )  | $V_{(BR)EBO}$ | 6.0    | –          | Vdc             |
| Collector Cutoff Current<br>( $V_{CE} = 60\text{ Vdc}$ , $V_{EB(off)} = 3.0\text{ Vdc}$ )  | $I_{CEX}$     | –      | 10         | nAdc            |
| Collector Cutoff Current<br>( $V_{CB} = 60\text{ Vdc}$ , $I_E = 0$ )<br>( $V_{CB} = 60\text{ Vdc}$ , $I_E = 0$ , $T_A = 125^\circ\text{C}$ ) | $I_{CBO}$     | –<br>– | 0.01<br>10 | $\mu\text{Adc}$ |
| Emitter Cutoff Current<br>( $V_{EB} = 3.0\text{ Vdc}$ , $I_C = 0$ )  | $I_{EBO}$     | –      | 100        | nAdc            |
| Base Cutoff Current<br>( $V_{CE} = 60\text{ Vdc}$ , $V_{EB(off)} = 3.0\text{ Vdc}$ )   | $I_{BL}$      | –      | 20         | nAdc            |

**ON CHARACTERISTICS**

|   |               |   |                                   |     |
|---|---------------|---|-----------------------------------|-----|
| DC Current Gain<br>( $I_C = 0.1\text{ mAdc}$ , $V_{CE} = 10\text{ Vdc}$ )<br>( $I_C = 1.0\text{ mAdc}$ , $V_{CE} = 10\text{ Vdc}$ )<br>( $I_C = 10\text{ mAdc}$ , $V_{CE} = 10\text{ Vdc}$ )<br>( $I_C = 10\text{ mAdc}$ , $V_{CE} = 10\text{ Vdc}$ , $T_A = -55^\circ\text{C}$ )<br>( $I_C = 150\text{ mAdc}$ , $V_{CE} = 10\text{ Vdc}$ ) (Note 2)<br>( $I_C = 150\text{ mAdc}$ , $V_{CE} = 1.0\text{ Vdc}$ ) (Note 2)<br>( $I_C = 500\text{ mAdc}$ , $V_{CE} = 10\text{ Vdc}$ ) (Note 2) | $h_{FE}$      | 35<br>50<br>75<br>35<br>100<br>50<br>40 | –<br>–<br>–<br>–<br>300<br>–<br>– | –   |
| Collector–Emitter Saturation Voltage (Note 2)<br>( $I_C = 150\text{ mAdc}$ , $I_B = 15\text{ mAdc}$ )<br>( $I_C = 500\text{ mAdc}$ , $I_B = 50\text{ mAdc}$ )   | $V_{CE(sat)}$ | –<br>–                                  | 0.3<br>1.0                        | Vdc |
| Base–Emitter Saturation Voltage (Note 2)<br>( $I_C = 150\text{ mAdc}$ , $I_B = 15\text{ mAdc}$ )<br>( $I_C = 500\text{ mAdc}$ , $I_B = 50\text{ mAdc}$ )  | $V_{BE(sat)}$ | 0.6<br>–                                | 1.2<br>2.0                        | Vdc |

 2. Pulse Test: Pulse Width  $\leq 300\ \mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ .


**SMALL-SIGNAL CHARACTERISTICS**

|  |            |             |             |                  |
|--|------------|-------------|-------------|------------------|
| Current-Gain – Bandwidth Product (Note 3)<br>( $I_C = 20 \text{ mAdc}$ , $V_{CE} = 20 \text{ Vdc}$ , $f = 100 \text{ MHz}$ )   | $f_T$      | 300         | –           | MHz              |
| Output Capacitance<br>( $V_{CB} = 10 \text{ Vdc}$ , $I_E = 0$ , $f = 1.0 \text{ MHz}$ )  | $C_{obo}$  | –           | 8.0         | pF               |
| Input Capacitance<br>( $V_{EB} = 0.5 \text{ Vdc}$ , $I_C = 0$ , $f = 1.0 \text{ MHz}$ )  | $C_{ibo}$  | –           | 25          | pF               |
| Input Impedance<br>( $I_C = 1.0 \text{ mAdc}$ , $V_{CE} = 10 \text{ Vdc}$ , $f = 1.0 \text{ kHz}$ )<br>( $I_C = 10 \text{ mAdc}$ , $V_{CE} = 10 \text{ Vdc}$ , $f = 1.0 \text{ kHz}$ )           | $h_{ie}$   | 2.0<br>0.25 | 8.0<br>1.25 | $k\Omega$        |
| Voltage Feedback Ratio<br>( $I_C = 1.0 \text{ mAdc}$ , $V_{CE} = 10 \text{ Vdc}$ , $f = 1.0 \text{ kHz}$ )<br>( $I_C = 10 \text{ mAdc}$ , $V_{CE} = 10 \text{ Vdc}$ , $f = 1.0 \text{ kHz}$ )    | $h_{re}$   | –<br>–      | 8.0<br>4.0  | $\times 10^{-4}$ |
| Small-Signal Current Gain<br>( $I_C = 1.0 \text{ mAdc}$ , $V_{CE} = 10 \text{ Vdc}$ , $f = 1.0 \text{ kHz}$ )<br>( $I_C = 10 \text{ mAdc}$ , $V_{CE} = 10 \text{ Vdc}$ , $f = 1.0 \text{ kHz}$ ) | $h_{fe}$   | 50<br>75    | 300<br>375  | –                |
| Output Admittance<br>( $I_C = 1.0 \text{ mAdc}$ , $V_{CE} = 10 \text{ Vdc}$ , $f = 1.0 \text{ kHz}$ )<br>( $I_C = 10 \text{ mAdc}$ , $V_{CE} = 10 \text{ Vdc}$ , $f = 1.0 \text{ kHz}$ )         | $h_{oe}$   | 5.0<br>25   | 35<br>200   | $\mu\text{mhos}$ |
| Collector Base Time Constant<br>( $I_E = 20 \text{ mAdc}$ , $V_{CB} = 20 \text{ Vdc}$ , $f = 31.8 \text{ MHz}$ )   | $r_b, C_C$ | –           | 150         | ps               |
| Noise Figure<br>( $I_C = 100 \mu\text{Adc}$ , $V_{CE} = 10 \text{ Vdc}$ , $R_S = 1.0 \text{ k}\Omega$ , $f = 1.0 \text{ kHz}$ )  | NF         | –           | 4.0         | dB               |

**SWITCHING CHARACTERISTICS**

|              |   |       |   |     |    |
|--------------|---|-------|---|-----|----|
| Delay Time   | ( $V_{CC} = 30 \text{ Vdc}$ , $V_{BE(off)} = -0.5 \text{ Vdc}$ ,<br>$I_C = 150 \text{ mAdc}$ , $I_{B1} = 15 \text{ mAdc}$ ) | $t_d$ | – | 10  | ns |
| Rise Time    |   | $t_r$ | – | 25  |    |
| Storage Time | ( $V_{CC} = 30 \text{ Vdc}$ , $I_C = 150 \text{ mAdc}$ ,<br>$I_{B1} = I_{B2} = 15 \text{ mAdc}$ )                           | $t_s$ | – | 225 | ns |
| Fall Time    |   | $t_f$ | – | 60  |    |

3.  $f_T$  is defined as the frequency at which  $|h_{fe}|$  extrapolates to unity.



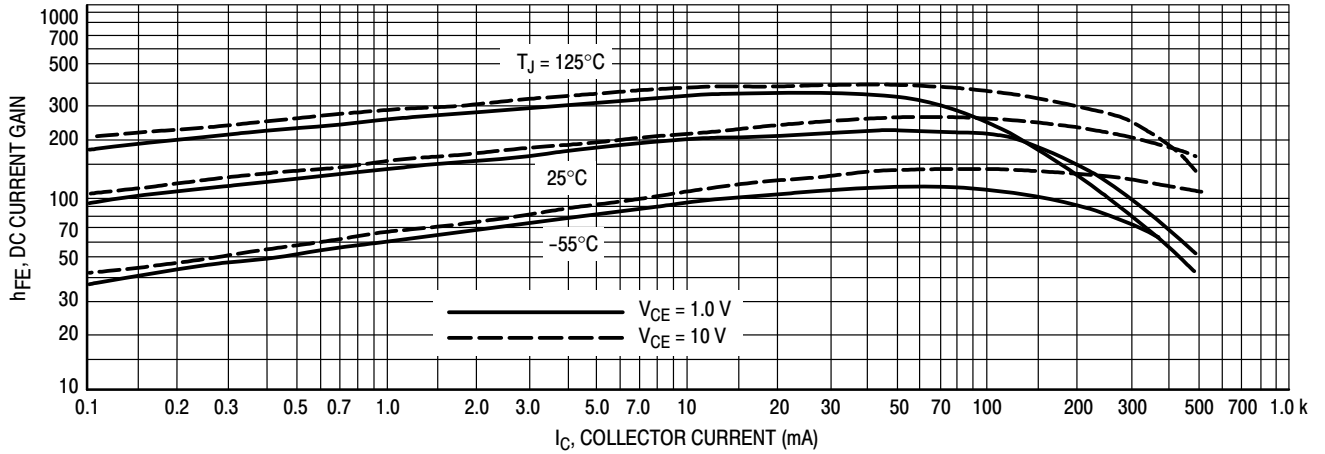


Figure 1. DC Current Gain

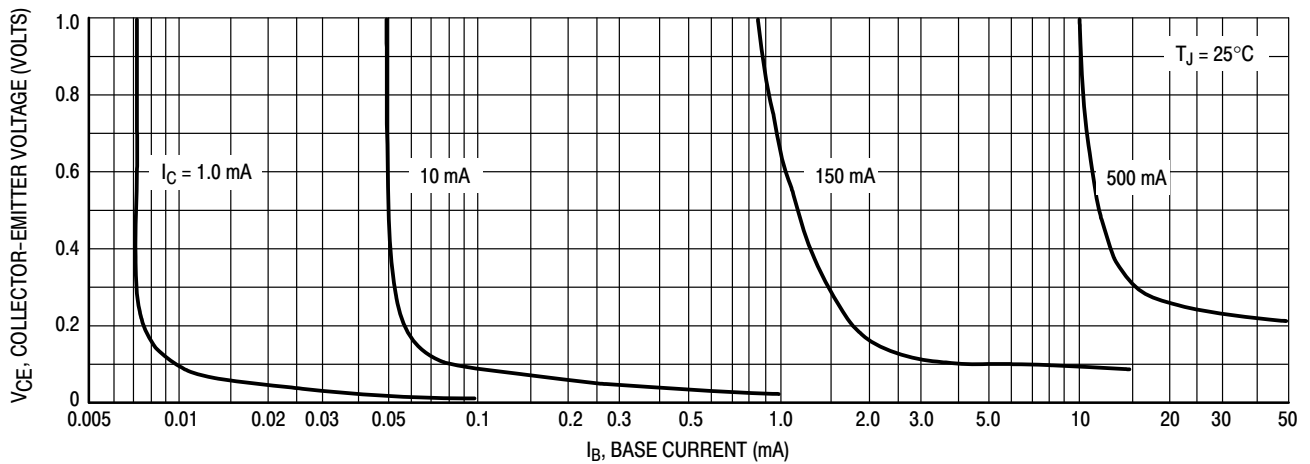


Figure 2. Collector Saturation Region

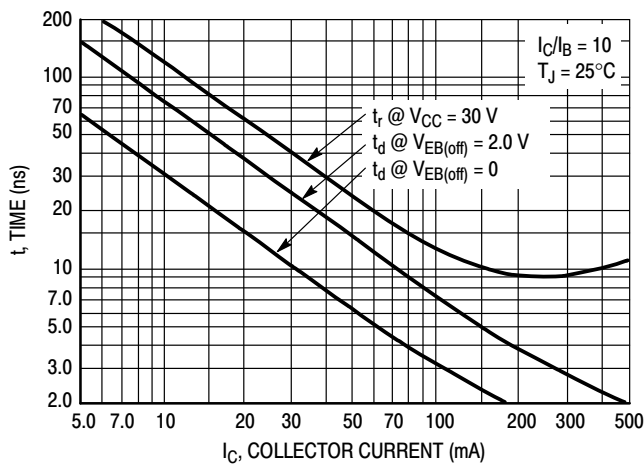


Figure 3. Turn-On Time

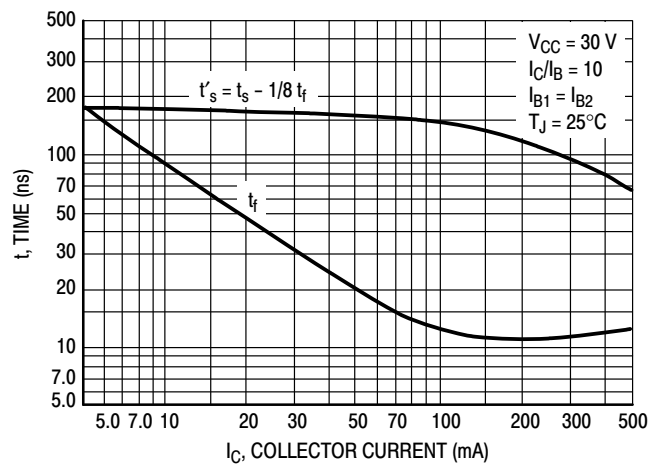


Figure 4. Turn-Off Time



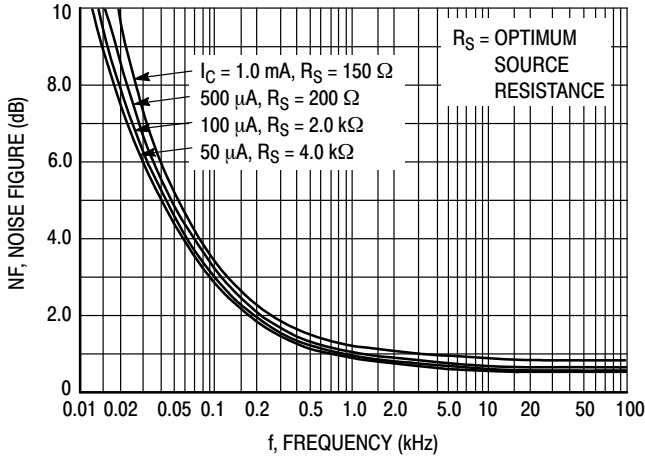


Figure 5. Frequency Effects

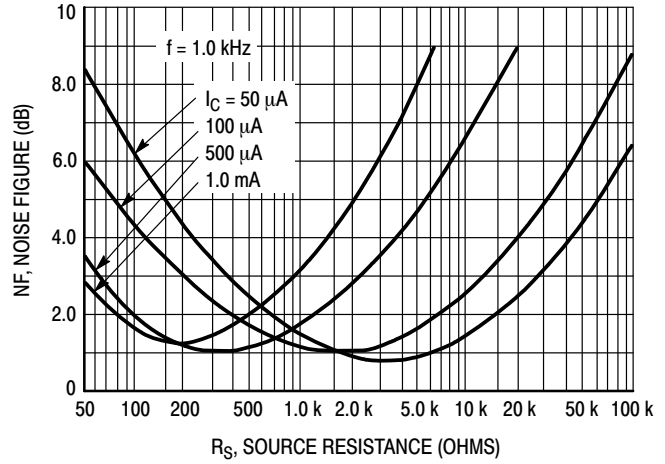


Figure 6. Source Resistance Effects

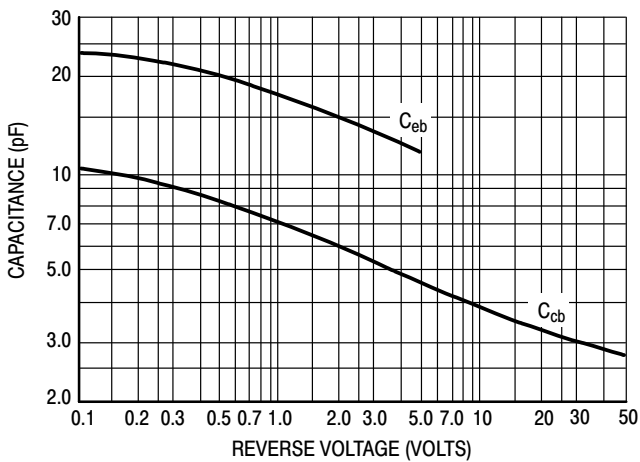


Figure 7. Capacitances

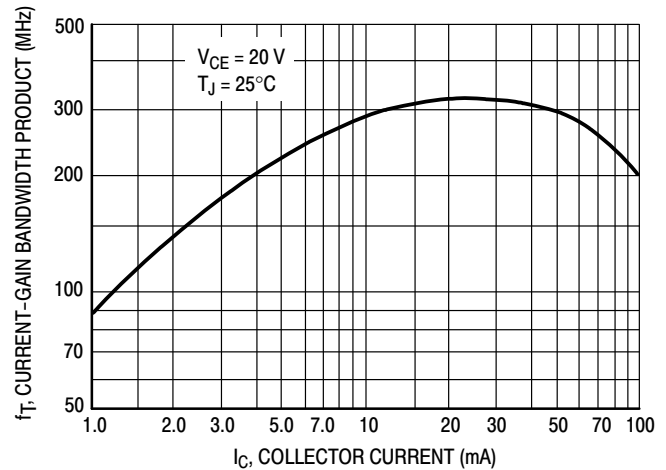


Figure 8. Current-Gain Bandwidth Product

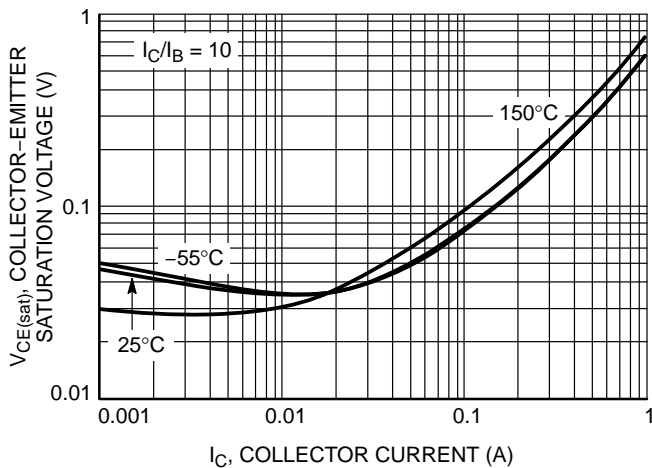


Figure 9. Collector Emitter Saturation Voltage

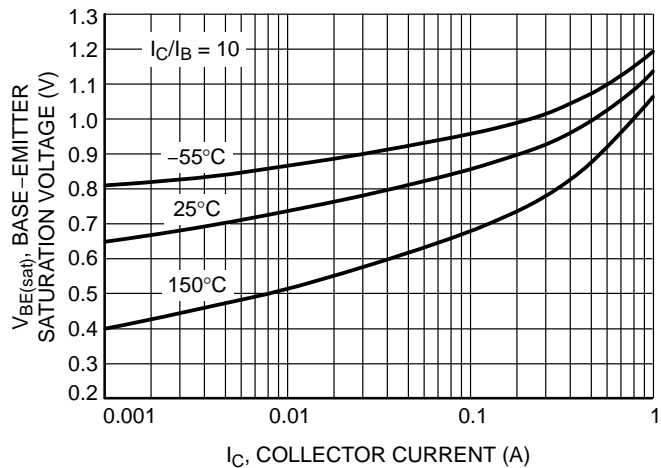
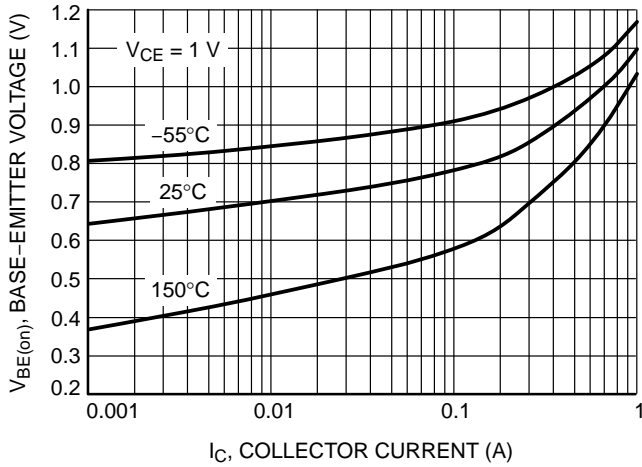
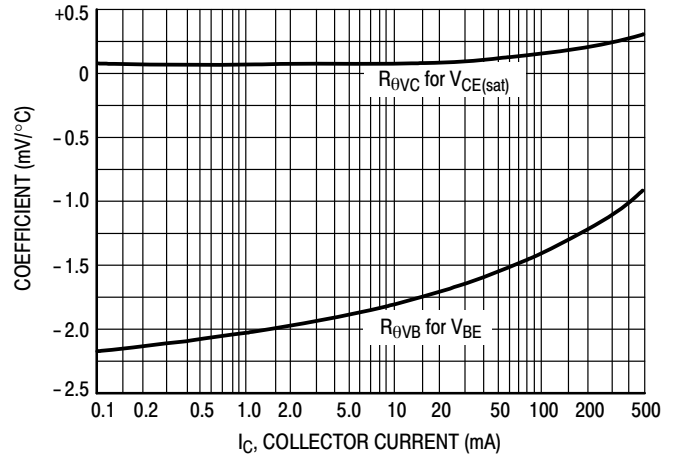


Figure 10. Base Emitter Saturation Voltage vs.

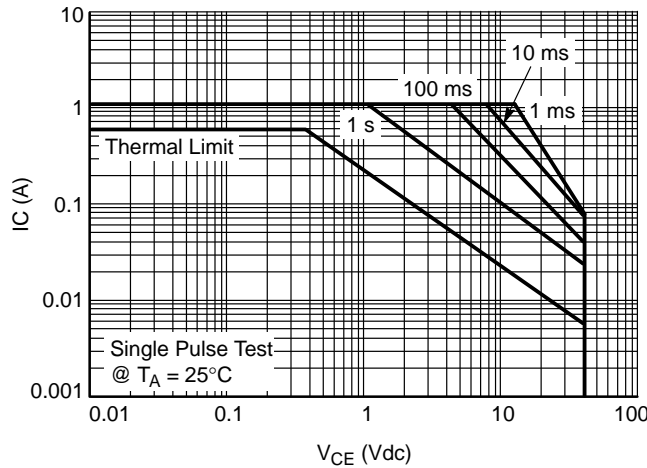




**Figure 11. Base Emitter Voltage vs. Collector Current**




**Figure 12. Temperature Coefficients**



**Figure 13. Safe Operating Area**



SOT-363

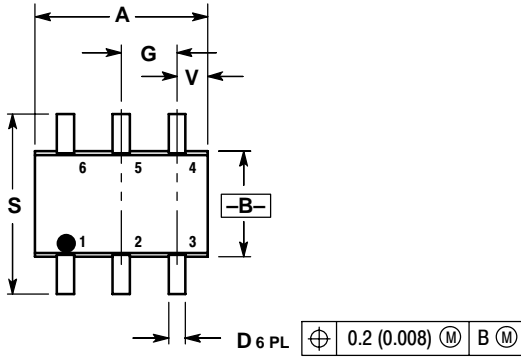

| DIM | INCHES    |       | MILLIMETERS |      |
|-----|-----------|-------|-------------|------|
|     | MIN       | MAX   | MIN         | MAX  |
| A   | 0.071     | 0.087 | 1.80        | 2.20 |
| B   | 0.045     | 0.053 | 1.15        | 1.35 |
| C   | 0.031     | 0.043 | 0.80        | 1.10 |
| D   | 0.004     | 0.012 | 0.10        | 0.30 |
| G   | 0.026 BSC |       | 0.65 BSC    |      |
| H   | ---       | 0.004 | ---         | 0.10 |
| J   | 0.004     | 0.010 | 0.10        | 0.25 |
| K   | 0.004     | 0.012 | 0.10        | 0.30 |
| N   | 0.008 REF |       | 0.20 REF    |      |
| S   | 0.079     | 0.087 | 2.00        | 2.20 |
| V   | 0.012     | 0.016 | 0.30        | 0.40 |

