RUIL&N

Gas Discharge Tubes (GDT)

SMD5050-B Series

H SF

Description

Gas discharge tubes (GDT) use noble gasses enclosed in ceramic tubes to provide an alternate circuit path for voltage spikes. The ceramic envelope and with nickel connectors allow for high loads. SMD5050 Gas Discharge Tubes (GDT) series has a surge rating of 10kA, 8/20µs.Offered in a Squared Surface Mount package, which helps to make pick and place on PCB process easier.

This GDT series is perfectly suited for broadband equipment applications. The GDT's low off-state capacitance is compatible with high bandwidth applications and this capacitance loading value does not vary if the voltage across the GDT changes.

SMD5050 Gas Discharge Tube (GDT) series are specifically designed for protection of electrical, multimedia, and communication equipment against over voltage transients in surface mount assembly applications.

Features

- I Excellent response to fast rising transients
- I Stable breakdown voltage
- I GHz working frequency
- I 8/20µs Impulse current capability:10KA
- I Surface Mount package
- I Non-Radioactive
- I Ultra Low capacitance (<0.8pF)
- I Size: 4.2mm*5mm*5mm
- I Storage and operational temperature: -40~+90°C



Electrical symbol



Applications


- I CATV equipment
 - Antennas
- I RS 485

L

- I Telecom Base Station
- I Power Supply AC Main
- I EV power Charging
- I Inverter/Variable
- I Frequency Drivers (VFDs)
- I IEEE 802.3 compliant Ethernet interfaces

- I Broad Band equipment
- I xDSL, ADSL, ADSL2, VDSL, and VDSL2
- I Medical Electronics
- I Test Equipment
- I General Telecom Equipment
- I Renewable Energy

Part Number Code

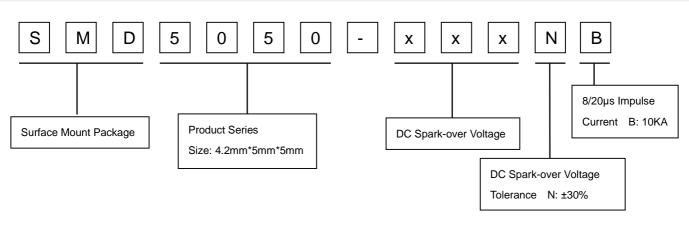

Specifications are subject to change without notice. Please refer to http://www.ruilon.com.cn for current information. Version: A2/2023-11-02 File Number: SP-GDT-007

RUIL

Gas Discharge Tubes (GDT)

SMD5050-B Series

Electrical Characteristics

	DC Spark-over Voltage ^{1) 2)} @100V/S	Impulse Spark-over Voltage		Insulation Resistance	Capacitance @1MHz	Glow Voltage @10mA	Arc Voltage @1A	Life Ratings			
Part Number								Impulse Discharge Current		Alternating Discharge Current	Impulse Life @10/1000µS
		100V/µS 1K	1KV/µS	;				@8/20µS		@50Hz 1S	
		Max	Max	Min	Мах	Typical	Typical	±5 times	1 time	10 times	300 times
	v	v	v	GΩ	pF	v	v	KA	KA	Α	Α
SMD5050-075NB	75±30%	500	600	1	0.8	60	10	10	12	10	100
SMD5050-090NB	90±30%	500	600	1	0.8	60	10	10	12	10	100
SMD5050-150NB	150±30%	500	600	1	0.8	60	10	10	12	10	100
SMD5050-200NB	200±30%	600	700	1	0.8	60	10	10	12	10	100
SMD5050-230NB	230±30%	600	700	1	0.8	60	10	10	12	10	100
SMD5050-300NB	300±30%	750	850	1	0.8	60	10	10	12	10	100
SMD5050-350NB	350±30%	800	850	1	0.8	60	10	10	12	10	100
SMD5050-400NB	400±30%	850	950	1	0.8	60	10	10	12	10	100
SMD5050-420NB	420±30%	850	950	1	0.8	60	10	10	12	10	100
SMD5050-470NB	470±30%	900	1000	1	0.8	60	10	10	12	10	100
Glow to Arc transition	Glow to Arc transition Current				<0.5A						
Weight	Weight				~0.42g						
Operation and storage temperature				-40~+90°C							
Climatic category (IEC 60068-1)				40/90/21							
Marking				Without							
Surface treatment				Matte-tin pl	ated						
Moisture sensitivity level 4)				1							

¹⁾ At delivery AQL 0.65 level II, DIN ISO 2859.

²⁾ In ionized mode.

³⁾ Insulation Resistance Measuring Voltage:

75V~150V at DC 50V

Other at DC 100V

⁴⁾ Tests according to JEDEC J-STD-020.


Terms in accordance with ITU-T K.12, IEC 61643-311, GB/T 9043, GB/T18802.311.


RUIL

SMD5050-B Series

HSF

Dimensions







Recommended Soldering Pad Layout


Symbol	Millimeters	Inches		
Α	5.0±0.2	0.197±0.008		
В	5.0±0.2	0.197±0.008		
С	4.2±0.3	0.165±0.012		
D	0.5±0.1	0.020±0.004		
х	1.2	0.047		
X1	4.0	0.165		
Y	5.5	0.217		

Packaging Information

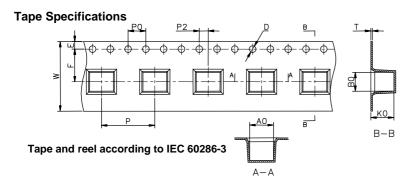

Reel Specifications





Symbol	Millimeters	Inches
W	16±0.3	0.630±0.012
A0	5.3±0.1	0.209±0.004
B0	4.3±0.1	0.17±0.004
K0	5.2±0.1	0.205±0.004
Р	12±0.1	0.472±0.004
F	7.5±0.1	0.295±0.004
Е	1.75±0.1	0.069±0.004
D	1.5+0.1/-0.0	0.059+0.004/-0.0
P0	4±0.1	0.157±0.004
P2	2±0.1	0.079±0.004
т	0.4±0.1	0.016±0.004
D0	13.3±0.15	0.524±0.006
D1	330±2	12.992±0.079
D2	100+1/-2	3.937+0.039/-0.079
W1	16.5±0.4	0.65±0.016

D2


W1



SMD5050-B Series

	Reel	Inner Box	Carton
Size	330×17mm	340×333×70mm	375×353×380mm
Quantity	MPQ/MOQ: 1 reel=1,000pcs	1 Inner Box=3 reels=3,000pcs	1Carton=5 Inner boxes=15,000pcs
Photos			RUMENT REALING

Soldering Parameters - Reflow Soldering (Surface Mount Devices)

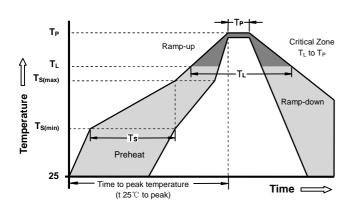

Reflow Cond	ition	Pb - Free assembly		
	-Temperature Min (T _{s(min)})	150°C		
Preheat	-Temperature Max (T _{s(max)})	200°C		
	- Time (min to max) (t_s)	60 -180 Seconds		
Average ram to peak	p up rate (Liquids Temp T _L)	3°C/second max		
T _{S(max)} to TL -	Ramp-up Rate	5°C/second max		
Reflow	 Temperature (T_L) (Liquids) 	217°C		
	- Time (min to max) (t_s)	60 -150 Seconds		
Peak Temper	rature (T _P)	260 +0/-5°C		
Time within 5 Temperature	5°C of actual peak (t _p)	10 - 30 Seconds		

Surface mounted components (SMD) may exhibit a temporary increase in the DC spark-over voltage after the solder reflow process. The components will recover within 24 hours. There is no quality defect nor change in protection levels during the temporary change in DC spark-over voltage.

RUILIN

SMD5050-B Series

H S F

Terms and definitions

NO.	ltem	Definitions		
1	Gas discharge tube(GDT)	A gap, or several gaps, in an enclosed discharge medium, other than air at atmospheric pressure, designed to protect apparatus or personnel, or both, from high transient voltages. Also referred to as "gas tube surge arrester".		
2	DC Spark-over Voltage	The voltage at which the gas discharge tube sparks over with slowly increasing d.c. voltage.		
3	Impulse Spark-over Voltage	The highest voltage which appears across the terminals of a gas discharge tube in the period between the application of an impulse of given wave-shape and the time when current begins to flow.		
5	Arc voltage	Voltage drop across the GDT during arc current flow.		
6	Glow voltage	Peak value of voltage drop across the GDT when a glow current is flowing.		
7	Impulse discharge current 8/20µs	Current impulse with a nominal virtual front time of 8 μs and a nominal time to half-value of 20 $\mu s.$		
8	Alternating Discharge Current	The rms value of an approximately sinusoidal alternating current passing through the gas discharge tube.		
9	Insulation Resistance	Insulation resistance shall be measured from each terminal to every other terminal of the GDT. The test is performed with DC50V when normal spark-over Voltage 70~150V, others with DC100V.		
10	Capacitance	The capacitance shall be measured once at 1 MHz between all terminals unless otherwise specified.		

Cautions and warnings

- I Do not operate surge arresters in power supply networks, whose maximum operating voltage exceeds the minimum spark-over voltage of the surge arresters.
- I Surge arresters may become hot in the event of longer periods of current stress (burn risk). In the event of overload the connectors may fail or the component may be destroyed.
- I Surge arresters must be handled with care and must not be dropped.
- I Do not continue to use damaged surge arresters.
- I The shown SMD pad dimensions represent a safe way to mount the arrester and are a recommendation of the manufacturer. During the reflow process it must be assured that no solder material reduces the insulation distance between the pads below the arrester.
- I SMD surge arresters should be soldered within 24 month after shipment.